PRODUCT NUMBER: CATO7242

**TECHNICAL SPECIFICATIONS** Drain Side drain Std. = Standard / Alt LF/RF Optional Pump Location(s): N/A Bath Weight (empty) 190 lbs Gallons to Operate 53-78 **ELECTRICAL SPECIFICATIONS** 

BATHERS: 2	
INSTALLATION	
٠	DECK (D)
	UNDER MOUNT (U)
٠	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



### STANDARD FEATURES & ACCESSORIES for TUB ONLY SERIES

N/A N/A

## STANDARD ACCESSORIES

Inline Stainless Steel Heater

EZ level Adjustable Legs

Motor/Pump

### **REQUIREMENTS**

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub

### **CUT OUT DIMENSIONS:**

**OVALS:** A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

**EZ CLEAN CAST ACRYLIC** LIMITED LIFETIME WARRANTY ((UL) us ANSI



# **OPTIONAL FEATURES & ACCESSORIES**

(Please type in the box below)

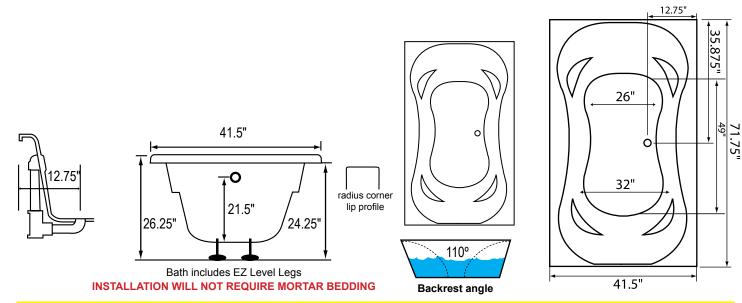

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.