Escape ESHG6636SKTF

HYDRO GOLD SERIES



PRODUCT NUMBER: ESHG6636SKTF-LH & ESHG6636SKTF-RH

TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	135 lbs	
Gallons to Operate	57-75	

ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(1) 115v 20AMP GFCI Circuit

BATHERS: 1	
INSTALLATION	
	DECK (D)
	UNDER MOUNT (U)
·	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



caps



STANDARD FEATURES & ACCESSORIES for HYDRO GOLD SERIES BATHS_

12 Water Massage Jets Back Massage System(s) (6 Jets) Accumassage Back and Neck Jets 6 Ultra Flow Jets - 6-

PUMPS

3.25 Hydropower 3-speed Pump Quiet Pad Anti-Vibration Mounted Pump

HEATERS

Stainless Steel Electric Heater

CONTROLS

Air Switch On/Off Control(s) For Hydro Pump & Mood Light 3 Speed Massage: High, Medium or Low

HydroClean Water Purity System HydroCleanse

STANDARD ACCESSORIES

Mood Light

Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome

Deluxe Cushion Pillow

Integral Tile Flange

EZ Level Adjustable Legs

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

REQUIREMENTS

Pump Locations: Select 1 Electrical: two 115v GFCI Circuits Drain: Select Color / Finish

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor.

CUT OUT DIMENSIONS:

OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole


cut out size


EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY (UL) US ANSI



OPTIONAL FEATURES & ACCESSORIES

(Please type in the box below)

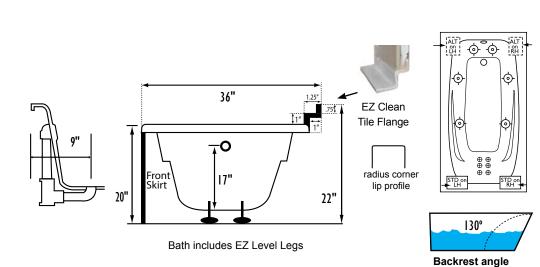



Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.