## Tranquil TRHG5226 52" x 26" x 36"

PRODUCT NUMBER: TRHG5226-LH & TRHG5226-RH

TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Location(s)	Std. = Standard	
Bath Weight (empty)	185 lbs	
Gallons to Operate	37-55	
ELECTRICAL SPECIFICATIONS		
Motor/Pump	(1) 115v 20AMP GFCI Circuits	
Inline Stainless Steel Heater	(1) 115v 20AMP GFCI Circuit	

### STANDARD FEATURES & ACCESSORIES for HYDRO GOLD SERIES BATHS

#### JETS

12 Water Massage Jets Back Massage System(s) (6 Jets) Accumassage Back and Neck Jets  $\oplus$ 6 Ultra Flow Jets -

#### PUMPS

3.25 Hydropower 3-speed Pump Quiet Pad Anti-Vibration Mounted Pump

HEATERS Stainless Steel Electric Heater

#### CONTROLS

Air Switch On/Off Control(s) For Hydro Pump & Mood Light 3 Speed Massage: High, Medium or Low

#### PURITY

HydroClean Water Purity System HydroCleanse

# **HYDRO GOLD SERIES**

BATHERS: 1		
IN	STALLATION	
	DECK (D)	
	UNDER MOUNT (U)	
•	ALCOVE (A)	
	FREESTANDING (F)	
	CLAWFOOT (L)	
	PEDESTAL (P)	

**≜** 🛛

Jet & Control placement may vary





#### STANDARD ACCESSORIES Mood Light

Deluxe Cable Drain - Polished Chrome **Deluxe Cushion Pillow** EZ Level Base FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

#### REQUIREMENTS

Pump Locations: Standard Electrical: two 115v 20AMP GFCI Circuits Drain and Grab Bar: Polished Chrome Tub should not be supported by the lip in any way. Level tub & screw or glue adjustable EZ Level legs to sub floor. **CUT OUT DIMENSIONS:** OVALS: A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

**EZ CLEAN CAST ACRYLIC** c LIMITED LIFETIME WARRANTY



12.25

#### **OPTIONAL FEATURES & ACCESSORIES** (Please type in the box below)

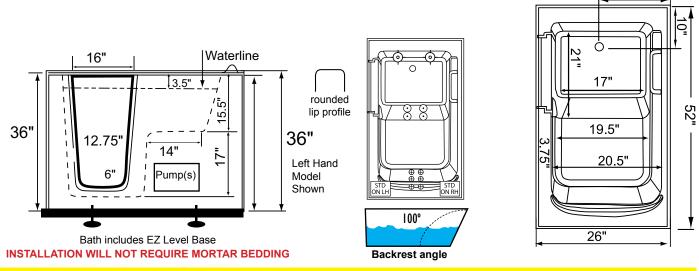

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.